



## HIGH VOLTAGE FAST RECOVERY RECTIFIER

# R2500 THRU R5000

VOLTAGE RANGE  
CURRENT


2500 to 5000 Volts  
0.2 Ampere

### FEATURES

- ▶ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ▶ Construction utilizes void-free molded plastic technique
- ▶ Low reverse leakage
- ▶ High forward surge current capability
- ▶ High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** JEDEC DO-41/DO-15 molded plastic body  
**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.012 ounce, 0.33 grams (DO-41)  
 0.014 ounce, 0.40 grams (DO-15)

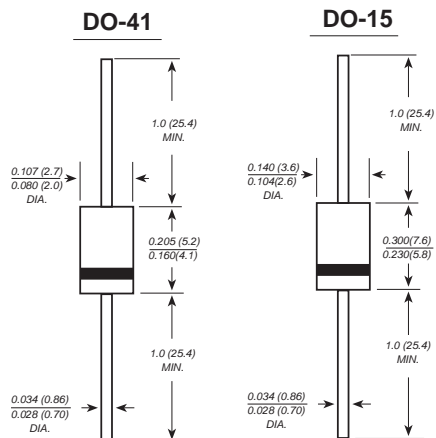

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

|  | SYMBOLS         | R2500       | R3000 | R4000 | R5000 | UNITS   |
|--|-----------------|-------------|-------|-------|-------|---------|
| Maximum repetitive peak reverse voltage  | $V_{RRM}$       | 2500        | 3000  | 4000  | 5000  | VOLTS   |
| Maximum RMS voltage  | $V_{RMS}$       | 1750        | 2100  | 2800  | 3500  | VOLTS   |
| Maximum DC blocking voltage  | $V_{DC}$        | 2500        | 3000  | 4000  | 5000  | VOLTS   |
| Maximum average forward rectified current<br>0.375" (9.5mm) lead length (see fig.1)                    | $I_{(AV)}$      | 0.2         |       |       |       | Amp     |
| Peak forward surge current<br>8.3ms single half sine-wave superimposed on<br>rated load (JEDEC Method) | $I_{FSM}$       | 30.0        |       |       |       | Amps    |
| Maximum instantaneous forward voltage at 0.2 A   | $V_F$           | 3.0         | 4.0   | 5.0   |       | Volts   |
| Maximum DC reverse current<br>at rated DC blocking voltage   | $I_R$           | 5.0<br>50   |       |       |       | $\mu A$ |
| Typical junction capacitance (NOTE 1)  | $C_J$           | 15.0        |       |       |       | pF      |
| Typical thermal resistance (NOTE 2)  | $R_{\theta JA}$ | 50.0        |       |       |       | °C/W    |
| Operating junction and storage temperature range   | $T_J, T_{STG}$  | -65 to +175 |       |       |       | °C      |

- Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.  
 2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted



# HIGH VOLTAGE FAST RECOVERY RECTIFIER

## R2500 THRU R5000

VOLTAGE RANGE  
CURRENT

2500 to 5000 Volts  
0.2 Ampere

