



## DISH AUTOMOTIVE RECTIFIER

**DR251 THRU DR256**  
**DRS251 THRU DRS256**

**VOLTAGE RANGE**     100 to 400 Volts

**CURRENT**             25.0 Amperes


### TECHNICAL SPECIFICATION:

#### FEATURES

- Low Leakage
- Low forward voltage drop
- High current capability
- High forward surge current capacity
- Glass passivated chip

#### MECHANICAL DATA

- Technology: vacuum soldered
- Case: Copper case
- Polarity: As marked of case bottom
- Lead: Plated Ni lead, solderable per MIL-STD-202E method 208C
- Weight: 0.032 ounces, 0.9 grams (DRS)  
0.035 ounces, 1.0 grams (DR)

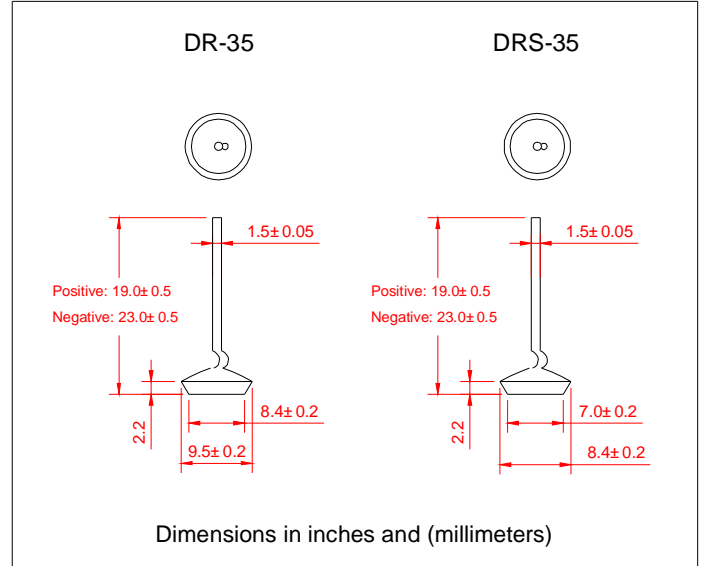

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60HZ, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	DR251 DRS251	DR252 DRS252	DR253 DRS253	DR254 DRS254	DR256 DRS256	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	100	200	300	400	600	Volts
Maximum RMS Voltage	$V_{RMS}$	70	140	210	280	420	Volts
Maximum DC Blocking Voltage	$V_{DC}$	100	200	300	400	600	Volts
Maximum Average Forward Rectified Current, At $T_c=105^\circ C$	$I_O$	25					Amps
Peak Forward Surge Current 3.3mS single half sine wave superimposed on Rated load (JEDEC method)	$I_{FSM}$	400					Amps
Rating for fusing ( $t < 8.3ms$ )	$I^2t$	664					A <sup>2</sup> S
Maximum instantaneous Forward Voltage at 100A	$V_F$	1.10					Volts
Maximum DC Reverse Current at Rated $T_A=25^\circ C$ DC Blocking Voltage $T_A=100^\circ C$	$I_R$	5.0					UA
		300					
Typical Thermal Resistance	$R_{\theta JC}$	1.0					$^\circ C/W$
Operating and Storage Temperature Range	$T_J, T_{STG}$	(-65 to +175)					$^\circ C$

#### Notes:

1. Enough heatsink must be considered in application.




# DISH AUTOMOTIVE RECTIFIER


**DR251 THRU DR256**  
**DRS251 THRU DRS256**

**VOLTAGE RANGE** 100 to 400 Volts  
**CURRENT** 25.0 Amperes


**F1G.1 TYPICAL FORWARD CURRENT DERATING CURVE**

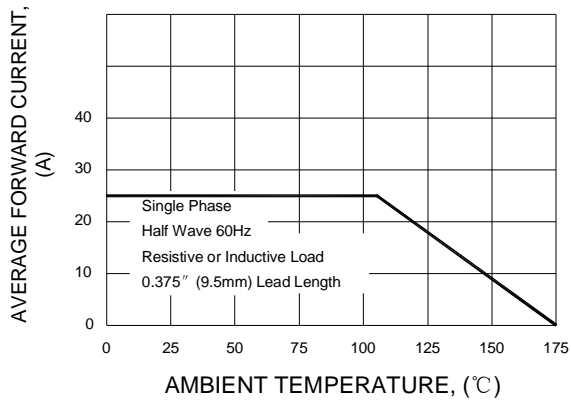

**F1G.2 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

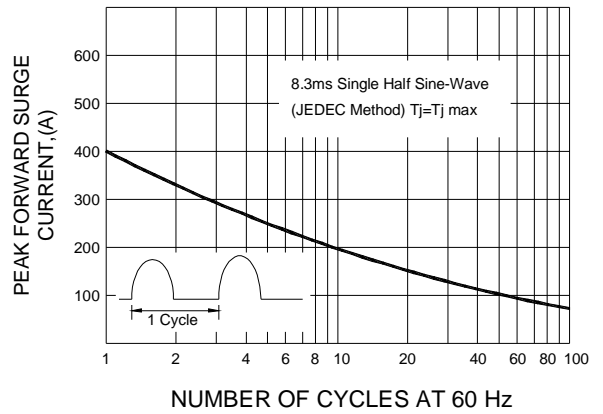

**F1G.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

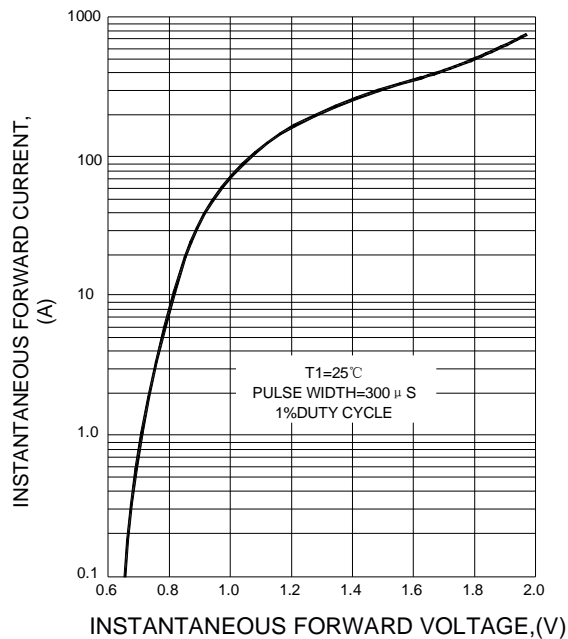

**F1G.4 FORWARD POWER DISSIPATION**

