

SOLID STATE TELECOMMUNICATION PROTECTION ARRESTOR

TPA62 THRU TPA270


Breakdown Voltage - 62 to 270 Volts
Holding Current: 150 Milliampere

FEATURES

- The plastic package carries Underwriters Laboratory
- Flammability Classification 94V-0
- Bidirectional crowbar protection
- Fast response
- High forward surge current capability
- High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

MECHANICAL DATA

- Case: JEDEC DO-15 molded plastic body
- Terminals : Plated axial leads, solderable per MIL-STD-750, Method 2026
- Mounting Position: Any
- Weight : 0.014 ounce, 0.40 grams

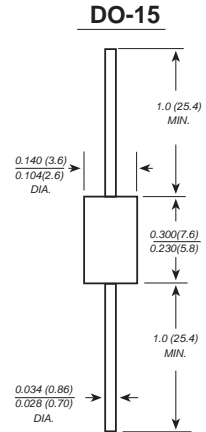

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


- Ratings at 25°C ambient temperature unless otherwise specified.

| | SYMBOLS | TPA 62 | TPA 68 | TPA 100 | TPA 120 | TPA 130 | TPA 180 | TPA 200 | TPA 220 | TPA 240 | TPA 270 | UNITS | |
|---|------------------|-------------|--------|---------|---------|---------|---------|---------|---------|---------|---------|-------|-------|
| Maximum breakdown voltage (I _R =1mA) | V _{BR} | 62 | 68 | 100 | 120 | 130 | 180 | 200 | 220 | 240 | 270 | VOLTS | |
| Maximum breakover voltage (I _{BO} =800mA) | V _{BO} | 82 | 90 | 133 | 160 | 173 | 240 | 267 | 293 | 320 | 360 | VOLTS | |
| Maximum off-state voltage | V _{RM} | 56 | 61 | 90 | 108 | 117 | 162 | 180 | 198 | 216 | 243 | VOLTS | |
| Maximum on-state voltage (I _T =1A) | V _T | 2 | 4 | | | | | | | | | VOLTS | |
| Maximum off-state current @ V _{RM} | I _{RM} | 2 | | | | | | | | | | | μA |
| Maximum holding current | I _H | 150 | | | | | | | | | | | mA |
| Maximum peak pulse current (10/1000μs) | I _{PP} | 50 | | | | | | | | | | | A |
| Maximum surge current (50 Hz) | I _{TSM} | 25 | | | | | | | | | | | A |
| Minimum critical off-state voltage rise rate | dV/dt | 2 | | | | | | | | | | | KV/μS |
| Typical junction capacitance (Note 1) | C _J | 150 | 100 | | | | | | | | | pF | |
| Junction temperature | T _J | -40 to +150 | | | | | | | | | | | °C |
| Storage temperature | T _{STG} | -40 to +150 | | | | | | | | | | | °C |
| Junction to leads on infinite heatsink | R _{θJL} | 60 | | | | | | | | | | | °C/W |
| Junction to ambient on printed circuit L(lead)=10mmA | R _{θJA} | 100 | | | | | | | | | | | °C/W |

Note 1: F=1MHz V_R=1V

NOTE1: MEANING OF PARAMETERS

| Symbol | Parameter |
|----------|--------------------|
| V_{RM} | Stand-off voltage |
| V_{BR} | Breakdown voltage |
| V_{BO} | Breakover voltage |
| I_H | Holding current |
| V_T | On-state voltage |
| I_{BO} | Breakover current |
| I_{PP} | Peak pulse current |

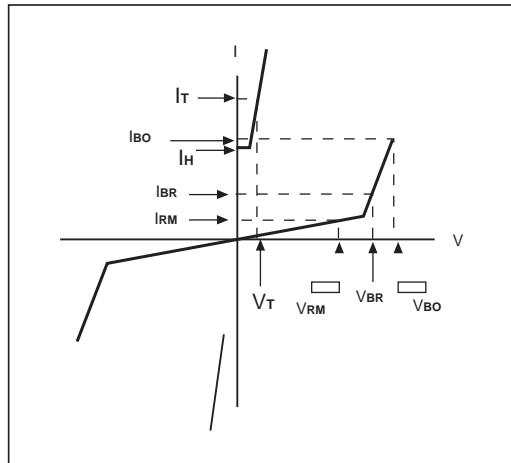

NOTE2: ALL TPA SERIES MEET THE SURGE REQUIREMENTS OF THE FOLLOWING STANDARDS:

| | | |
|---------------|-----------------|-------|
| CCITTK 17-K20 | 10/700 μ s | 1.5KV |
| | 5/310 μ s | 38A |
| VDE0433 | 10/700 μ s | 2KV |
| | 5/200 μ s | 50A |
| CNET | 0.5/700 μ s | 1.5KV |
| | 0.2/310 μ s | 38A |

FIG. 1-PULSE WAVE FORM(10/1000 μ s)

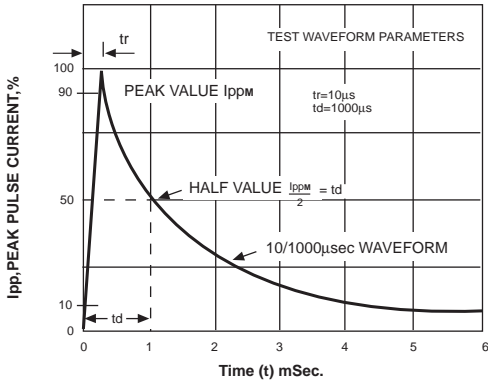


FIG. 2-NORMALIZED DC HOLDING CURRENT VS CASE TEMPERATURE

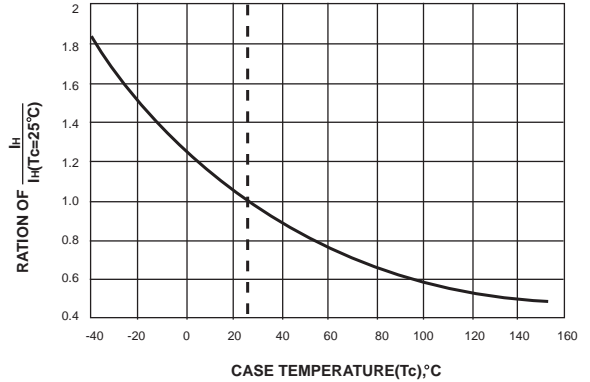


FIG. 3-TYPICAL TRANSIENT THERMAL IMPEDANCE

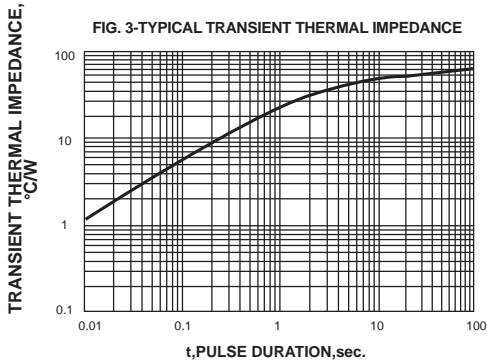


FIG. 4-NORMALIZED V_{BO} CHANGE VS JUNCTION TEMPERATURE

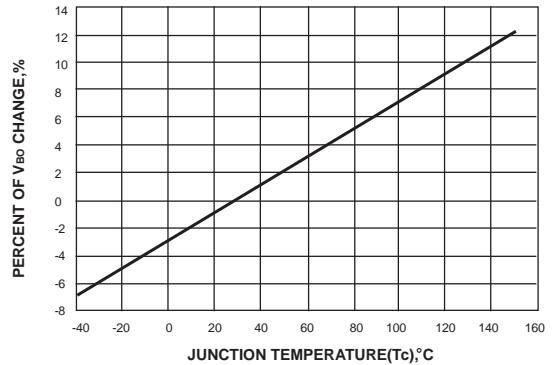


FIG. 5-NON REPETITIVE SURGE PEAK ON-STATE CURRENT VERSUS OVERLOAD DURATION (T_j INITIAL= $25^\circ C$)

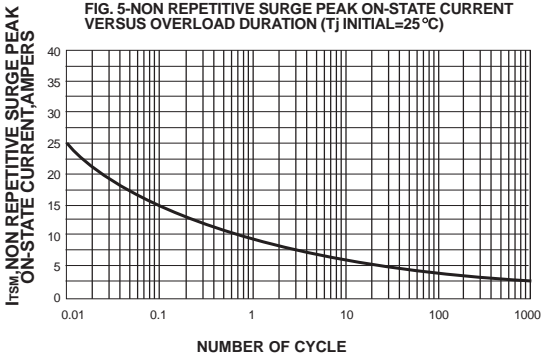


FIG. 6- ON-STATE CURRENT VERSUS ON-STATE VOLTAGE(TYPICAL VALUES).

