


ZPY3V9 THRU ZYP100

Features

- Silicon Planar Power Zener Diodes
- For use in stabilizing and clipping circuits with high power rating
- The Zener voltages are graded according to the international E 12 standard. Smaller voltage tolerances are available upon request
- These diodes are also available in the MELF case with the type designation ZMY3V9 to ZMY100
- Lead (Pb)-free component
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

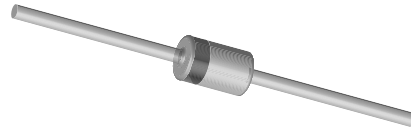

17173

Mechanical Data

Case: DO41 Glass case

Weight: approx. 310 mg

Cathode Band Color: black

Packaging Codes/Options:

TR/5 k per 13" reel (52 mm tape), 25 k/box

TAP/5 k per Ammo mag. (52 mm tape), 25 k/box

Absolute Maximum Ratings

T_{amb} = 25 °C, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Zener current (see Table "Characteristics")				
Power dissipation		P _{tot}	1.3 ¹⁾	W

¹⁾ Valid provided that leads at a distance of 4 mm from case are kept at ambient temperature

Thermal Characteristics

T_{amb} = 25 °C, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Thermal resistance junction to ambient air		R _{thJA}	110 ¹⁾	K/W
Maximum junction temperature		T _j	175	°C
Storage temperature range		T _{stg}	- 55 to + 175	°C

¹⁾ Valid provided that leads at a distance of 4 mm from case are kept at ambient temperature



GLASS SILICON ZENER DIODES

ZPY3V9 THRU ZYP100

Electrical Characteristics

Partnumber	Zener Voltage Range ²⁾		Dynamic Resistance	Temperature Coefficient of Zener Voltage		Test Current	Reverse Voltage	Admissible Zener Current ¹⁾
	V_Z at I_{ZT}		r_{zj} at I_{ZT1} , $f = 1$ kHz	TC_{VZ} at I_{ZT}		I_{ZT}	V_R at $I_R = 0.5 \mu A$	I_Z at $T_{amb} = 25 \text{ }^\circ C$
	V		Ω	$10^{-4}/^\circ C$		mA	V	mA
	min	max	typ	min	max			
ZPY3V9	3.7	4.1	4 (< 7)	- 7	2	100	-	290
ZPY4V3	4.0	4.6	4 (< 7)	- 7	3	100	-	260
ZPY4V7	4.4	5.0	4 (< 7)	- 7	4	100	-	235
ZPY5V1	4.8	5.4	2 (< 5)	- 6	5	100	> 0.7	215
ZPY5V6	5.2	6.0	1 (< 2)	- 3	5	100	> 1.5	193
ZPY6V2	5.8	6.6	1 (< 2)	- 1	6	100	> 2.0	183
ZPY6V8	6.4	7.2	1 (< 2)	0	7	100	> 3.0	157
ZPY7V5	7.0	7.9	1 (< 2)	0	7	100	> 5.0	143
ZPY8V2	7.7	8.7	1 (< 2)	3	8	100	> 6.0	127
ZPY9V1	8.5	9.6	2 (< 4)	3	8	50	> 7.0	117
ZPY10	9.41	10.6	2 (< 4)	5	9	50	> 7.5	105
ZPY11	10.4	11.6	3 (< 7)	5	10	50	> 8.5	94
ZPY12	11.4	12.7	3 (< 7)	5	10	50	> 9.0	85
ZPY13	12.4	14.1	4 (< 9)	5	10	50	> 10	78
ZPY15	13.8	15.8	4 (< 9)	5	10	50	> 11	70
ZPY16	15.3	17.1	5 (< 10)	7	11	25	> 12	63
ZPY18	16.8	19.1	5 (< 11)	7	11	25	> 14	57
ZPY20	18.8	21.2	6 (< 12)	7	11	25	> 15	52
ZPY22	20.8	23.3	7 (< 13)	7	11	25	> 17	48
ZPY24	22.8	25.6	8 (< 14)	7	12	25	> 18	42
ZPY27	25.1	28.9	9 (< 15)	7	12	25	> 20	38
ZPY30	28	32	10 (< 20)	7	12	25	> 22.5	35
ZPY33	31	35	11 (< 20)	7	12	25	> 25	31
ZPY36	34	38	25 (< 60)	7	12	10	> 27	29
ZPY39	37	41	30 (< 60)	8	12	10	> 29	26
ZPY43	40	46	35 (< 80)	8	13	10	> 32	24
ZPY47	44	50	40 (< 80)	8	13	10	> 35	22
ZPY51	48	54	45 (< 100)	8	13	10	> 38	20
ZPY56	52	60	50 (< 100)	8	13	10	> 42	18
ZPY62	58	66	60 (< 130)	8	13	10	> 47	16
ZPY68	64	72	65 (< 130)	8	13	10	> 51	14
ZPY75	70	79	70 (< 160)	8	13	10	> 56	13
ZPY82	77	88	80 (< 160)	8	13	10	> 61	12
ZPY91	85	96	120 (< 250)	9	13	5	> 68	11
ZPY100	94	106	130 (< 250)	9	13	5	> 75	10

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 10 mm from case

²⁾ Tested with pulses $t_p = 5$ ms

ZPY3V9 THRU ZYP100

Typical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

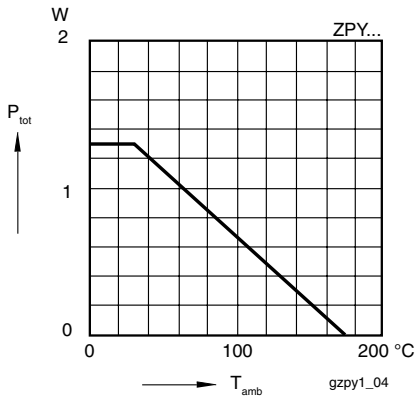


Figure 1. Admissible Power Dissipation vs. Ambient Temperature

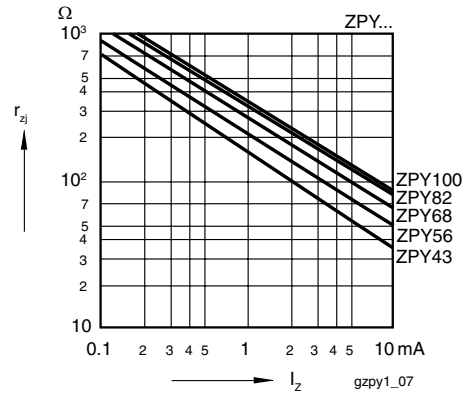


Figure 4. Dynamic Resistance vs. Zener Current

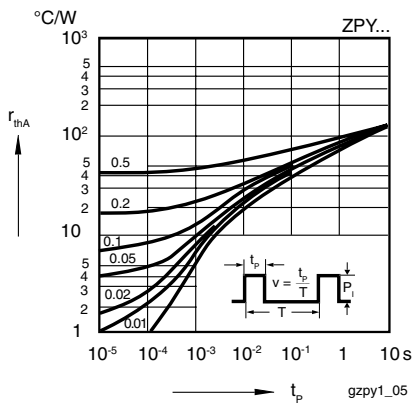


Figure 2. Pulse Thermal Resistance vs. Pulse Duration

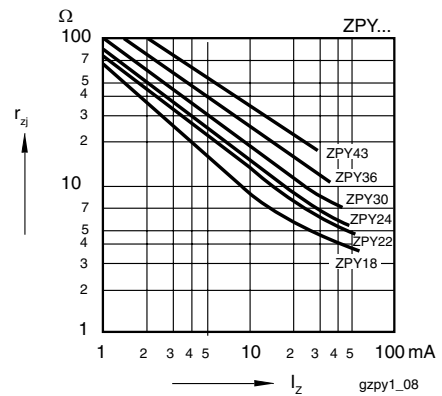


Figure 5. Dynamic Resistance vs. Zener Current

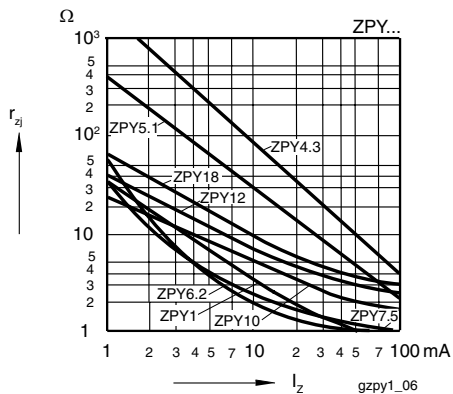


Figure 3. Dynamic Resistance vs. Zener Current

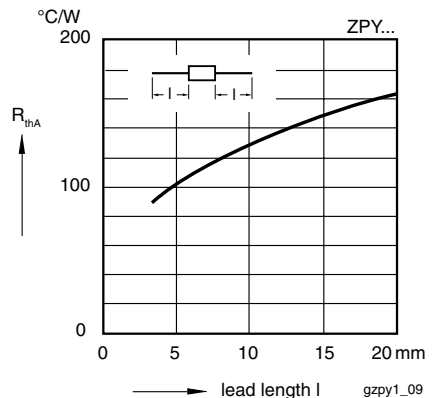


Figure 6. Thermal Resistance vs. Lead Length

ZPY3V9 THRU ZYP100

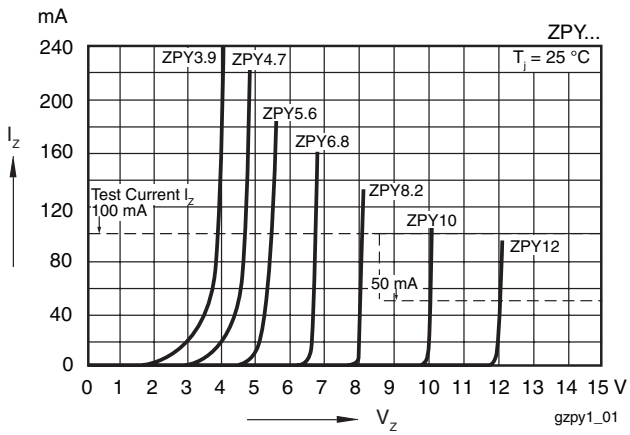


Figure 7. Breakdown Characteristics

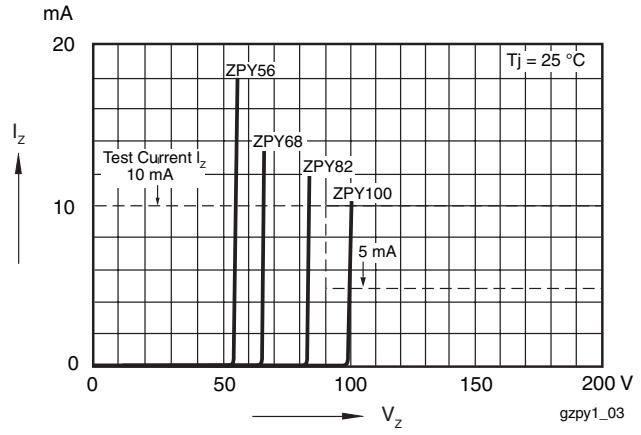


Figure 9. Breakdown Characteristics

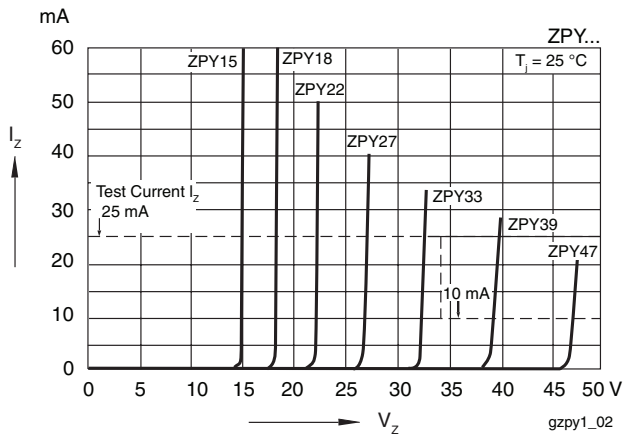


Figure 8. Breakdown Characteristics

Package Dimensions in mm (Inches): DO41

