

## SCHOTTKY BARRIER RECTIFIER

# SR120 THRU SR1200

**VOLTAGE RANGE**  
**CURRENT**


**20 to 200 Volts**  
**1.0 Ampere**

### FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- High forward surge current capability
- High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length,  
5 lbs. (2.3kg) tension

### MECHANICAL DATA

- Case : JEDEC DO-41 molded plastic body
- Terminals : Plated axial leads, solderable per MIL-STD-750, Method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight : 0.012 ounce, 0.33 grams

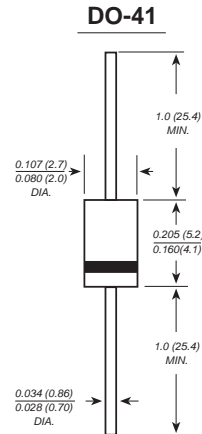

*Dimensions in inches and (millimeters)*

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified.
- Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	SR 120	SR 130	SR 140	SR 150	SR 160	SR 170	SR 180	SR 190	SR 1100	SR 1150	SR 1200	UNITS	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	70	80	90	100	150	200	VOLTS	
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	49	56	63	70	105	140	VOLTS	
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	70	80	90	100	150	200	VOLTS	
Maximum average forward rectified current 0.375" (9.5mm) lead length (see fig.1)	$I_{AV}$	1.0											Amp	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	40.0											Amps	
Maximum instantaneous forward voltage at 1.0A	$V_F$	0.55		0.70		0.85			0.95			Volts		
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	$I_R$	0.5					0.2			0.2			mA	
		10.0			5.0			2.0						
Typical junction capacitance (NOTE 1)	$C_J$	110			80									pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	50.0											°C/W	
Operating junction temperature range	$T_J$	-65 to +125					-65 to +150						°C	
Storage temperature range	$T_{STG}$	-65 to +150											°C	

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted



# SCHOTTKY BARRIER RECTIFIER


SR120 THRU SR1200

VOLTAGE RANGE  
CURRENT

20 to 200 Volts  
1.0 Ampere


AVERAGE FORWARD RECTIFIED CURRENT,  
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

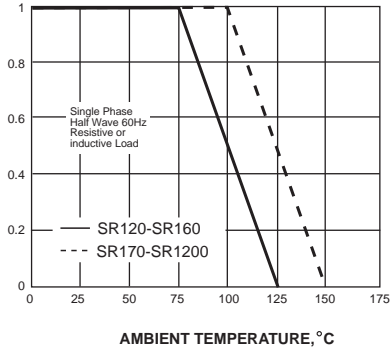


PEAK FORWARD SURGE CURRENT,  
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

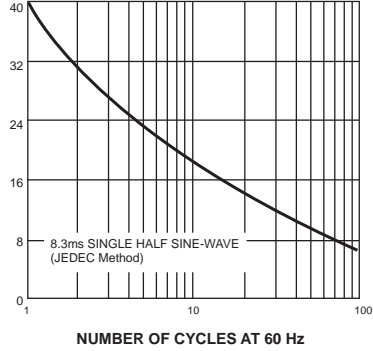


INSTANTANEOUS FORWARD CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

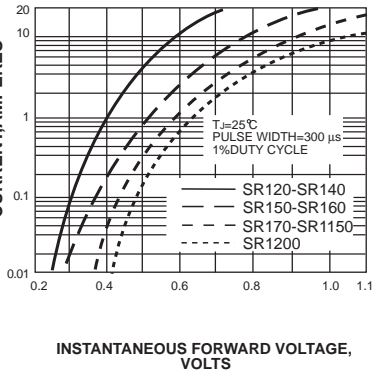


INSTANTANEOUS REVERSE CURRENT,  
MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

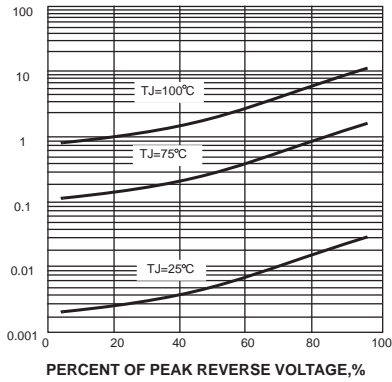

JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

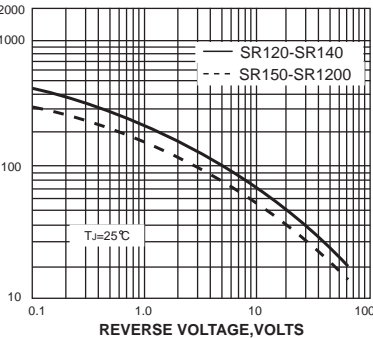

TRANSIENT THERMAL IMPEDANCE,  
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

