



FAST RECOVERY GLASS PASSIVATED RECTIFIERS

1N4933GTHRU 1N4937G

VOLTAGE RANGE
CURRENT


50 to 600 Volts
1.0 Ampere

FEATURES

- The plastic package carries Underwriters Laboratory
- Flammability Classification 94V-0
- Fast switching for high efficiency
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

MECHANICAL DATA

- Case : DO-41 molded plastic body
- Terminals : Plated axial leads, solderable per MIL-STD-750,
Method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight : 0.012 ounce, 0.33 grams

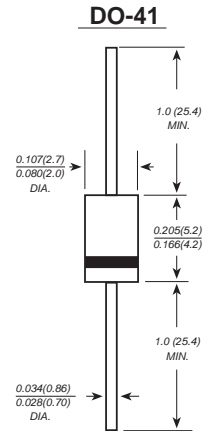

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified.
- Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	1N 4933G	1N 4934G	1N 4935G	1N 4936G	1N 4937G	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	VOLTS
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	VOLTS
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{(AV)}$	1.0					Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30.0					Amps
Maximum instantaneous forward voltage at 1.0A	V_F	1.2					Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	5.0 50.0					μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	200					ns
Typical junction capacitance (NOTE 2)	C_J	15.0					pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	50.0					$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +150					$^\circ\text{C}$

- Note:** 1. Reverse recovery condition $I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$
 2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted



FAST RECOVERY GLASS PASSIVATED RECTIFIERS


1N4933GTHRU 1N4937G

VOLTAGE RANGE
CURRENT

50 to 600 Volts
1.0 Ampere

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES


FIG. 1- FORWARD CURRENT DERATING CURVE

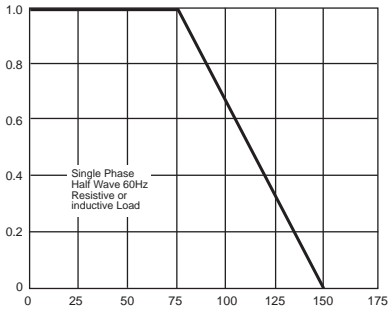

AMBIENT TEMPERATURE, °C


PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

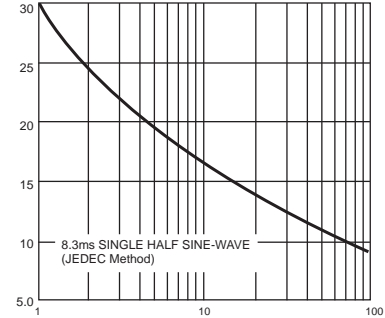


NUMBER OF CYCLES AT 60 Hz

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

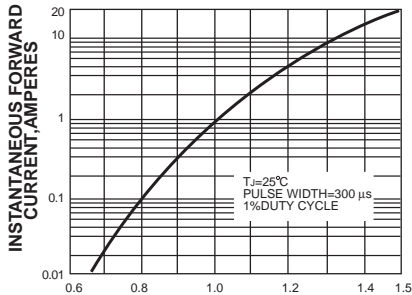


INSTANTANEOUS FORWARD VOLTAGE,
VOLTS

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

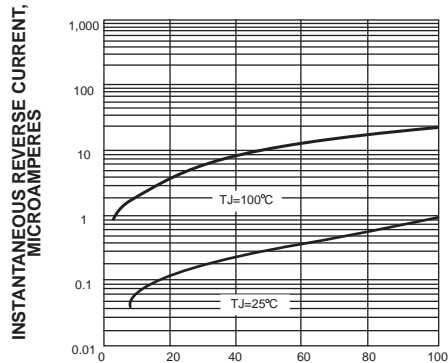


PERCENT OF PEAK REVERSE VOLTAGE, %

FIG. 5-TYPICAL JUNCTION CAPACITANCE

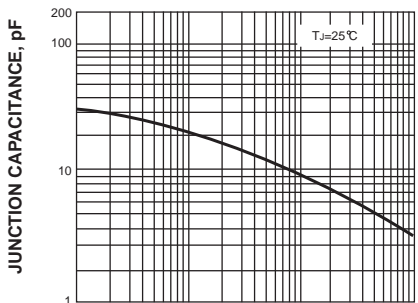

REVERSE VOLTAGE, VOLTS

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

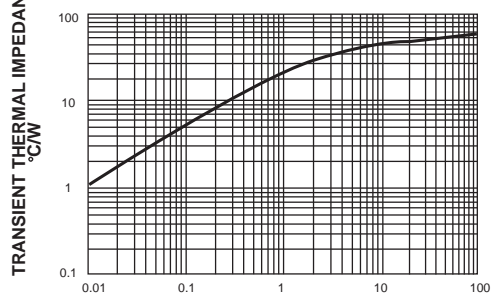

t, PULSE DURATION, sec.