

KBPC25005 THRU KBPC2510 AND MB2505 THRU MB2510

VOLTAGE RANGE

50 to 1000 Volts

CURRENT


25.0 Ampere

FEATURES

- The plastic package carries Underwriters Laboratory
- Flammability Classification 94V-0
- Ideal for printed circuit boards
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed: 260°C/10 seconds, 5 lbs. (2.3kg) tension

MECHANICAL DATA

- Case :Metal case
- Terminals : Plated 0.25" (6.35mm)lug.
- Polarity : Polarity symbols marked on case
- Mounting : Thru hole for #8 screw, 20in.-lbs. torque max.
- Weight : 1.02 ounce, 29 grams

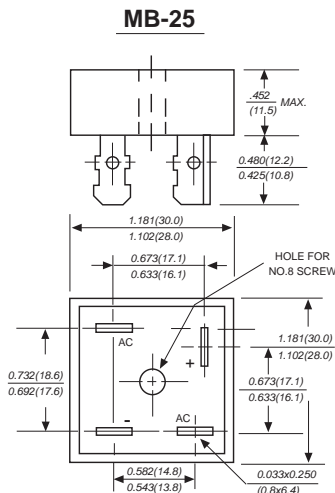

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified.
- Single phase, half wave 60Hz, resistive or inductive load, for current capacitive load, derate by 20%.

	SYMBOLS	KBPC 25005 MR2505	KBPC 2501 MB251	KBPC 2502 MB252	KBPC 2504 MB254	KBPC 2506 MB256	KBPC 2508 MR258	KBPC 2510 MB2510	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	VOLTS
Maximum average forward output rectified current at $T_c=50^\circ\text{C}$ (Note 1,2)	$I_{(AV)}$	25							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	300.0							Amps
Rating for Fusing($t<8.3\text{ms}$)	I^2t	373							A^2s
Maximum instantaneous forward voltage drop per bridge element at 12.5A	V_F	1.1							Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	I_R	10							μA
		1.0							mA
Isolation voltage from case to leads	V_{ISO}	2500							V_{AC}
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	2.0							$^\circ\text{C}/\text{W}$
Operating junction temperature range	T_J	-65 to +150							$^\circ\text{C}$
storage temperature range	T_{STG}	-65 to +150							$^\circ\text{C}$

NOTES:


1. Unit mounted on 5" x 6" x 4.9" thick (12.8cm x 15.2cm x 12.4cm) Al. plate.
2. Bolt down on heat-sink with silicone thermal compound between bridge and mounting surface for maximum heat transfer efficiency with #8 screw.

KBPC25005 THRU KBPC2510 AND MB2505 THRU MB2510

VOLTAGE RANGE 50 to 1000 Volts
CURRENT 25.0 Ampere


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

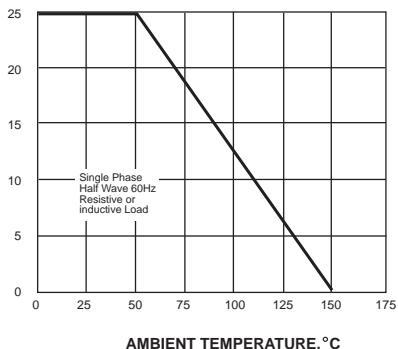


PEAK FORWARD SURGE CURRENT, AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

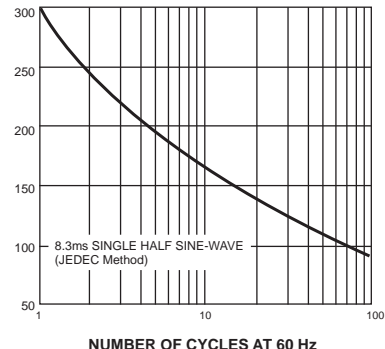


INSTANTANEOUS FORWARD CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

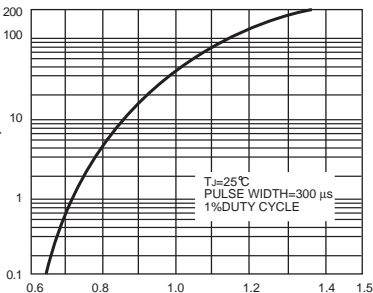


INSTANTANEOUS REVERSE CURRENT, MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

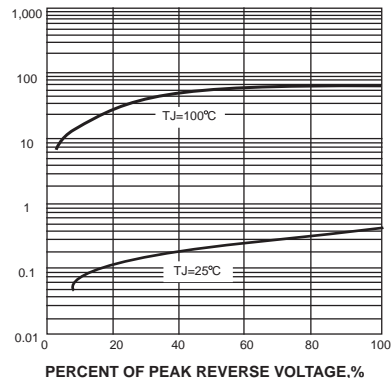

JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

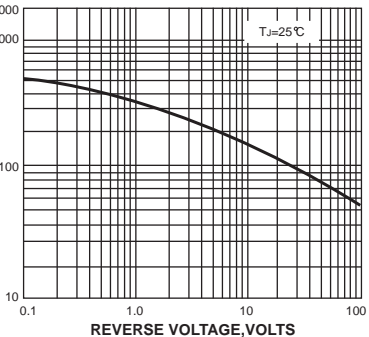

TRANSIENT THERMAL IMPEDANCE, °C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

