

PFS

SCHOTTKY BARRIER RECTIFIER

SB120S THRU SB1200S

VOLTAGE RANGE
CURRENT


20 to 200 Volts
1.0 Ampere

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Guardring for overvoltage protection
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

MECHANICAL DATA

- Case : R-1 molded plastic body
- Terminals : Plated axial leads, solderable per MIL-STD-750, Method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight : 0.007 ounce, 0.20 gramS

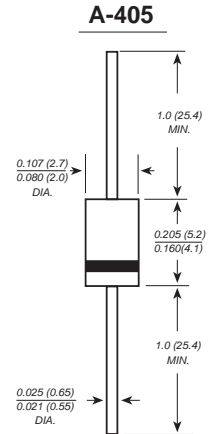

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	SB 120S	SB 130S	SB 140S	SB 150S	SB 160S	SB 170S	SB 180S	SB 190S	SB 1100S	SB 1150S	SB 1200S	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	70	80	90	100	150	200	VOLTS
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	49	56	63	70	105	140	VOLTS
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	70	80	90	100	150	200	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length (see fig.1)	$I_{(AV)}$	1.0											Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	40.0											Amps
Maximum instantaneous forward voltage at 1.0A	V_F	0.55		0.70		0.85			0.95			Volts	
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	0.5						0.2			mA		
		10.0			5.0			2.0					
Typical junction capacitance (NOTE 1)	C_J	110			80						pF		
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	50.0											°C/W
Operating junction temperature range	T_J	-65 to +125					-65 to +150						°C
Storage temperature range	T_{STG}	-65 to +150											°C

- Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted



SCHOTTKY BARRIER RECTIFIER


SB120S THRU SB1200S

VOLTAGE RANGE
CURRENT

20 to 200 Volts
1.0 Ampere


AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

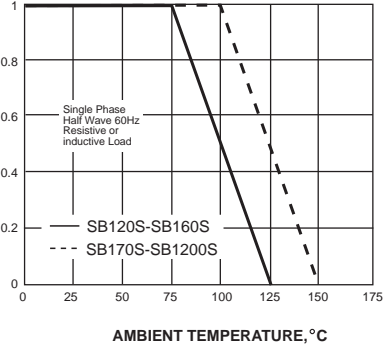


PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

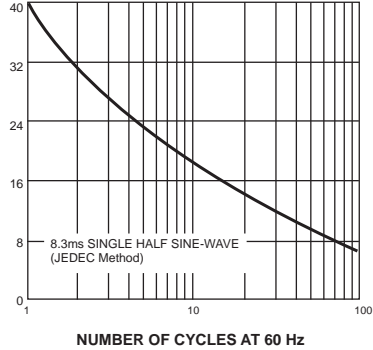


INSTANTANEOUS FORWARD CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

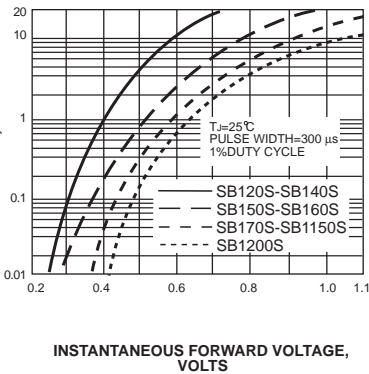


INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

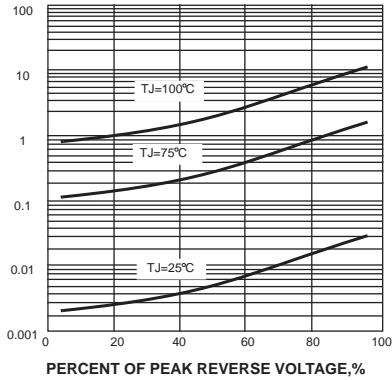

JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

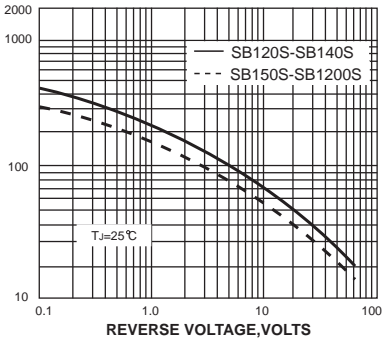

TRANSIENT THERMAL IMPEDANCE, °C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

